


Dimensioni

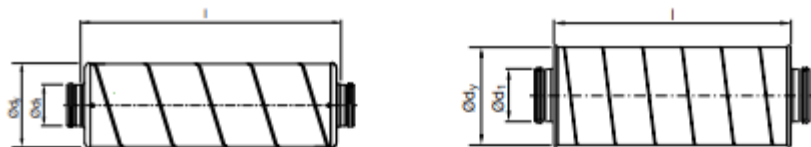

	Ød ₁ mm	l nom	Perdita di inserzione (dB) in banda di ottave (Hz)								Ød ₂ mm	l nom	Peso kg
			63	125	250	500	1k	2k	4k	8k			
SLU50	80	300	1	5	8	15	25	25	21	15	190	300	2,0
	80	600	2	8	14	28	49	50	47	24	190	600	3,4
	80	900	3	10	21	40	50	50	50	34	190	900	4,9
	80	1200	4	13	27	50	50	50	50	43	190	1200	6,4
	100	300	1	5	7	15	25	25	21	13	210	360	2,1
	100	600	1	7	12	25	43	48	35	20	210	660	3,5
	100	900	2	10	17	34	50	50	49	28	210	960	5,0
	100	1200	3	12	22	44	50	50	50	35	210	1260	6,5
	125	300	0	4	5	13	23	20	16	11	235	365	2,6
	125	600	1	5	10	22	39	37	26	16	235	665	4,3
	125	900	1	7	14	30	50	50	37	21	235	965	6,0
	125	1200	2	9	18	39	50	50	47	26	235	1265	7,7
	160	300	0	3	5	11	22	16	11	7	270	370	2,7
	160	600	1	4	8	19	37	28	17	11	270	670	4,7
	160	900	1	5	12	27	50	39	24	14	270	970	6,7
	160	1200	2	6	15	35	50	50	30	17	270	1270	8,6
	200	300	0	2	4	9	19	11	7	5	310	385	3,8
	200	600	1	3	8	15	28	19	12	8	310	685	6,2
200	900	2	4	11	21	37	28	16	10	310	985	8,7	
200	1200	2	5	14	27	46	36	21	13	310	1285	11,1	
250	300	0	1	3	7	15	8	5	5	365	300	4,9	
250	600	1	2	6	14	26	14	8	7	365	600	7,9	
250	900	1	3	9	19	38	19	11	9	365	900	10,9	
250	1200	2	4	11	24	50	24	13	11	365	1200	13,9	
315	600	2	5	9	14	12	6	4	5	510	600	14,3	
315	900	3	6	13	20	19	10	6	7	510	900	19,6	
315	1200	4	8	16	27	25	15	9	10	510	1200	24,9	
400	600	4	5	8	10	7	4	4	6	625	600	17,2	
400	900	4	5	10	17	13	6	6	8	625	900	23,6	
400	1200	6	6	13	24	18	8	7	10	625	1200	30,0	
500	900	4	4	10	14	8	4	6	6	735	900	30,1	
500	1200	3	5	11	21	12	6	7	9	735	1200	37,8	
630	900	2	3	7	12	5	4	4	5	880	900	40,3	
630	1200	2	4	8	17	7	4	5	7	880	1200	50,6	
800	1200	2	3	8	11	5	4	5	6	1030	1200	66,7	

27667

27236

27237

27238